

Category3 Keystone Jack

Description

Accepts 1, 2 or 3-pair solid conductor


Material

Housing: ABS UL94V-0

IDC: PC UL94V-0, Accept 22-26 AWG Solid Wire

Structural Feature

Conductor color code according to T568B and T568A
Contacts color marking of on the transparent module cover
Linear conductor layout
Conductor connection by simple cover latching

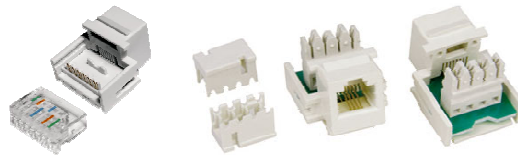

Electrical Characteristic

According to UL1863
Current rating: 1.5A Max.
Voltage rating: 150V
Contact resistance: 20mΩ
Insulation Resistance: 500MΩ
Dielectric Withstand Voltage: 1000V AC RMS, 60Hz/1min

Ordering Information

KJ3-N-64	i-Net Networks Keystone Jack Category3 Non PCB 6P4C
KJ3-P-64	i-Net Networks Keystone Jack Category3 PCB 6P4C

