


Category5e SFTP Solid Indoor Cable

Specifications

Meets ANSI/EIA/TIA 568-B.2 requirements
 Meets general purpose cable UL-1581 CM rating
 Meets fire retardant low smoke IEC60332-1 rating
 Meets plenum UL-910 rating

Description

Shielded Copper cable, 4 pairs, category 5e, solid
 Shield: Aluminum foil and wire braid
 Cable is used for indoor installation

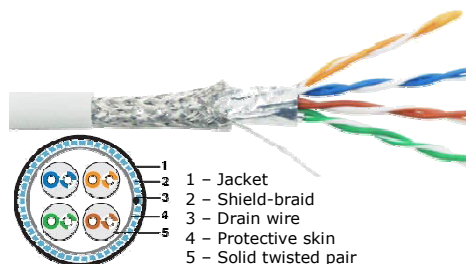

Materials

Conductive material: wire made of soft annealed electrolytic copper
 Conductor insulation: HDPE
 The cable jacket: PVC
 An aluminum tape shield is helically applied over the cable core with a minimum overlap of 25% or 5 mm (0.19"), thickness – 0.025 mm (0.001"), width – 20 mm (0.78"), and braid of 16 tinned Copper wires

Technical Characteristics

Conductor diameter: 7 x 0.2 mm (0.008") (24 AWG)
 Insulated conductor diameter: 0.93 ± 0.2 mm (0.036" ± 0.008")
 Outer cable diameter: 5.6 ± 0.2 mm (0.22" ± 0.008")
 Jacket thickness: 0.4 mm (0.0157")
 Minimum bend radius: 8xØ while installation, 6xØ while vertical cabling, 4xØ while horizontal cabling
 Conductor elongation: 14% minimum
 Drain wire diameter: 0.5 mm (0.019")
 Operating temperature: -4°F to +167°F (-20°C to +75°C)
 Weight per 1000 ft (304.8 m): 12.5 kg (26.89 lbs)
 Standard package: 304.8 m (1000 ft)

Electrical Characteristics

Frequency, MHz	RL	Attenuation, dB	NEXT, dB	PSNEXT, dB	ELFEXT, dB	PSELFEXT, dB
0.772	-	1.8	67.0	64.0	-	-
1.0	20.0	2.0	65.3	62.3	63.8	60.8
4.0	23.0	4.0	56.3	53.3	51.7	48.7
8.0	24.5	5.8	51.8	48.8	45.7	42.7
10.0	25.0	6.5	50.3	47.3	43.8	40.8
16.0	25.0	8.2	47.3	44.3	39.7	36.7
20.0	25.0	9.3	45.8	42.8	37.7	34.7
25.0	24.3	10.4	44.3	41.3	35.8	32.8
31.25	23.6	11.7	42.9	39.9	33.9	30.9
62.5	21.5	17.0	38.4	35.4	27.8	24.8
100.0	20.1	22.0	35.3	32.3	23.8	20.8

Max conductor resistance at 20°C (68°F)	9.38Ω/100m (2.9Ω/100ft)
Max Resistance Unbalance	5%
Max pair-to-ground capacitance unbalance	330pF/100m (101pF/100ft)
Characteristic Impedance at 0.772-100 MHz	85Ω-115Ω
Mutual capacitance	5.6nF/m (1.7nF/ft)
Spark Test	2.5kV

Ordering Information

HI5ESSM-**C** i-Net Networks Horizontal Indoor Cable Category5e SFTP Solid 24AWG 4Pair Milky Gray CM
C **C**—CM, **L**—LSZH, **P**—Plenum